


9293
 PMPT TRANSVAC HSI
 MEDIUM TANK SYSTEM
 90 GPH PER HOUR

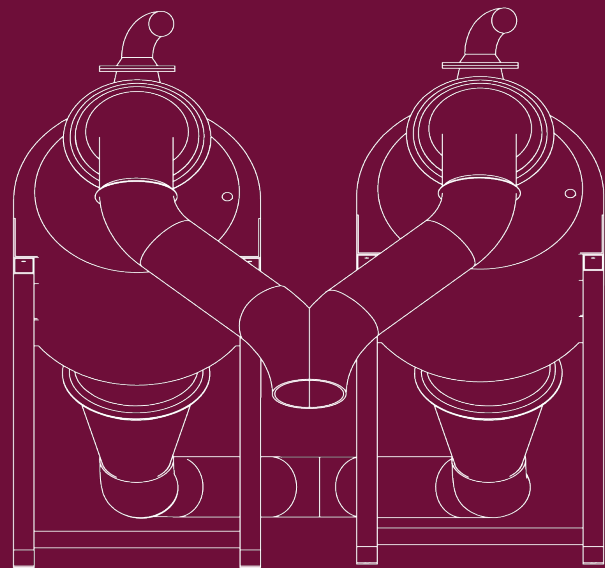

www.transvac.com

ALL MODELS HAVE A MAXIMUM SUCTION TANK HEIGHT OF 27 FEET / 8 METERS.
 2 TANK TRANSVAC® SYSTEMS WILL GIVE A CONTINUOUS SUCTION AND DISCHARGE.

Model	Length	Width	Height	Volume of Fish/Hr.	Tank Volume	Discharge Height	Empty Weight	Full Weight	Recommended Hose Dia. ‡
2515	119 in / 302 cm	24 in / 70 cm	72 in / 183 cm	10 tons	11 ft3 / .31m3	35 ft/12m	995 lbs / 451 kg	1677 lbs / 761 kg	6-8 in / 15.25-20.3cm
3615	153 in / 390 cm	36 in / 91 cm	94 in / 240 cm	30 tons	44 ft3 / 1.25 m3	50 ft/15m *	2085 lbs / 946 kg	4813 lbs / 2183 kg	10 in / 25.4 cm
3715	160 in / 488 cm	36 in / 91 cm	100 in / 254 cm	40 tons	62 ft3 / 1.75 m3	50 ft/15m *	2305 lbs / 1045 kg	5250 lbs / 2277 kg	10 in / 25.4 cm
4515	144 in / 367 cm	48 in / 122 cm	107 in / 273 cm	50 tons	79 ft3 / 2.25 m3	50 ft/15m *	2540 lbs / 1150 kg	6050 lbs / 2744 kg	12 in / 30.5cm
4715	192 in / 488 cm	48 in / 122 cm	108 in / 274 cm	60 tons	102 ft3 / 2.89m3	50 ft/15m *	3666 lbs / 1633 kg	9990 lbs / 4531 kg	12 in / 30.5cm
2525	119 in / 302 cm	50 in / 127 cm	72 in / 183 cm	20 tons	22 ft3 / .62 m3	50 ft/15m *	1332 lbs / 604 kg	2696 lbs / 1223 kg	6-8 in / 15.25-20.3cm
3625	153 in / 390 cm	82 in / 210 cm	94 in / 240 cm	60 tons	88 ft3 / 2.49 m3	50 ft/15m *	4896 lbs / 2221 kg	10352 lbs / 4696 kg	10 in / 25.4 cm
3725	192 in / 488 cm	82 in / 210 cm	100 in / 254 cm	80 tons	100 ft3 / 2.8 m3	50 ft/15m *	5896 lbs / 2674 kg	15032 lbs / 6818 kg	10 in / 25.4 cm
4525	144 in / 367 cm	100 in / 254 cm	107 in / 273 cm	100 tons	158 ft3 / 4.5 m3	50 ft/15m *	7050 lbs / 3197 kg	18750 lb / 8504 kg	12 in / 30.5cm
4725	192 in / 488 cm	100 in / 254 cm	108 in / 274 cm	120 tons	204 ft3 / 5.77m3	50 ft/15m *	7300 lbs / 3311 kg	19948 lbs / 9048 kg	12 in / 30.5cm

* Longer distances and heights over 50 feet require additional modifications to our standard units.

AT ETI, WE KNOW HOW
 IMPORTANT IT IS TO MAINTAIN
 THE QUALITY OF YOUR
 PRODUCT, SO ALL TRANSVAC®
 SYSTEMS ARE DESIGNED TO BE
 "FISH FRIENDLY" ENSURING
 THAT YOUR LIVE FISH ARE
 TRANSFERRED "DAMAGE FREE"
 SO THAT YOU MAY GET TOP
 DOLLAR IN THE MARKET!

All pumps feature: Hydraulic,
 diesel, and electric power options,
 Suction height 27 ft (8m) max.
 Marine-grade aluminum or stainless
 steel tank construction depending
 on pressures. Liquid ring pumps
 with stainless steel impellers and
 special optional configurations for
 extra high or extra long discharges.



environmental technologies, inc.

201 Frontage Rd. N., Suite C. Pacific, WA 98047 USA
 Tel: 253.804.2507 Fax 253.804-2581
 sales@transvac.com

3525


MEDIUM VOLUME TWIN TANK SYSTEM
60 TONS PER HOUR* (FISH)

DIMENSIONS (Approx.)

- Overall Length: 153" (390cm)
- Overall Width 82" (210cm)
- Overall Height 94" (240cm)
- Power pack dimensions will vary if required

FEATURES:

- Damage-free transfer of catch
- Simple operation
- 60 tons per hour
- Automatic operation
- (remote control available)
- 10" (25.4cm) diameter hose
- 27' (8.0 m) suction lift
- Non-corrosive marine aluminum or stainless steel construction depending on pressures
- Electric, diesel or hydraulic power
- Low maintenance

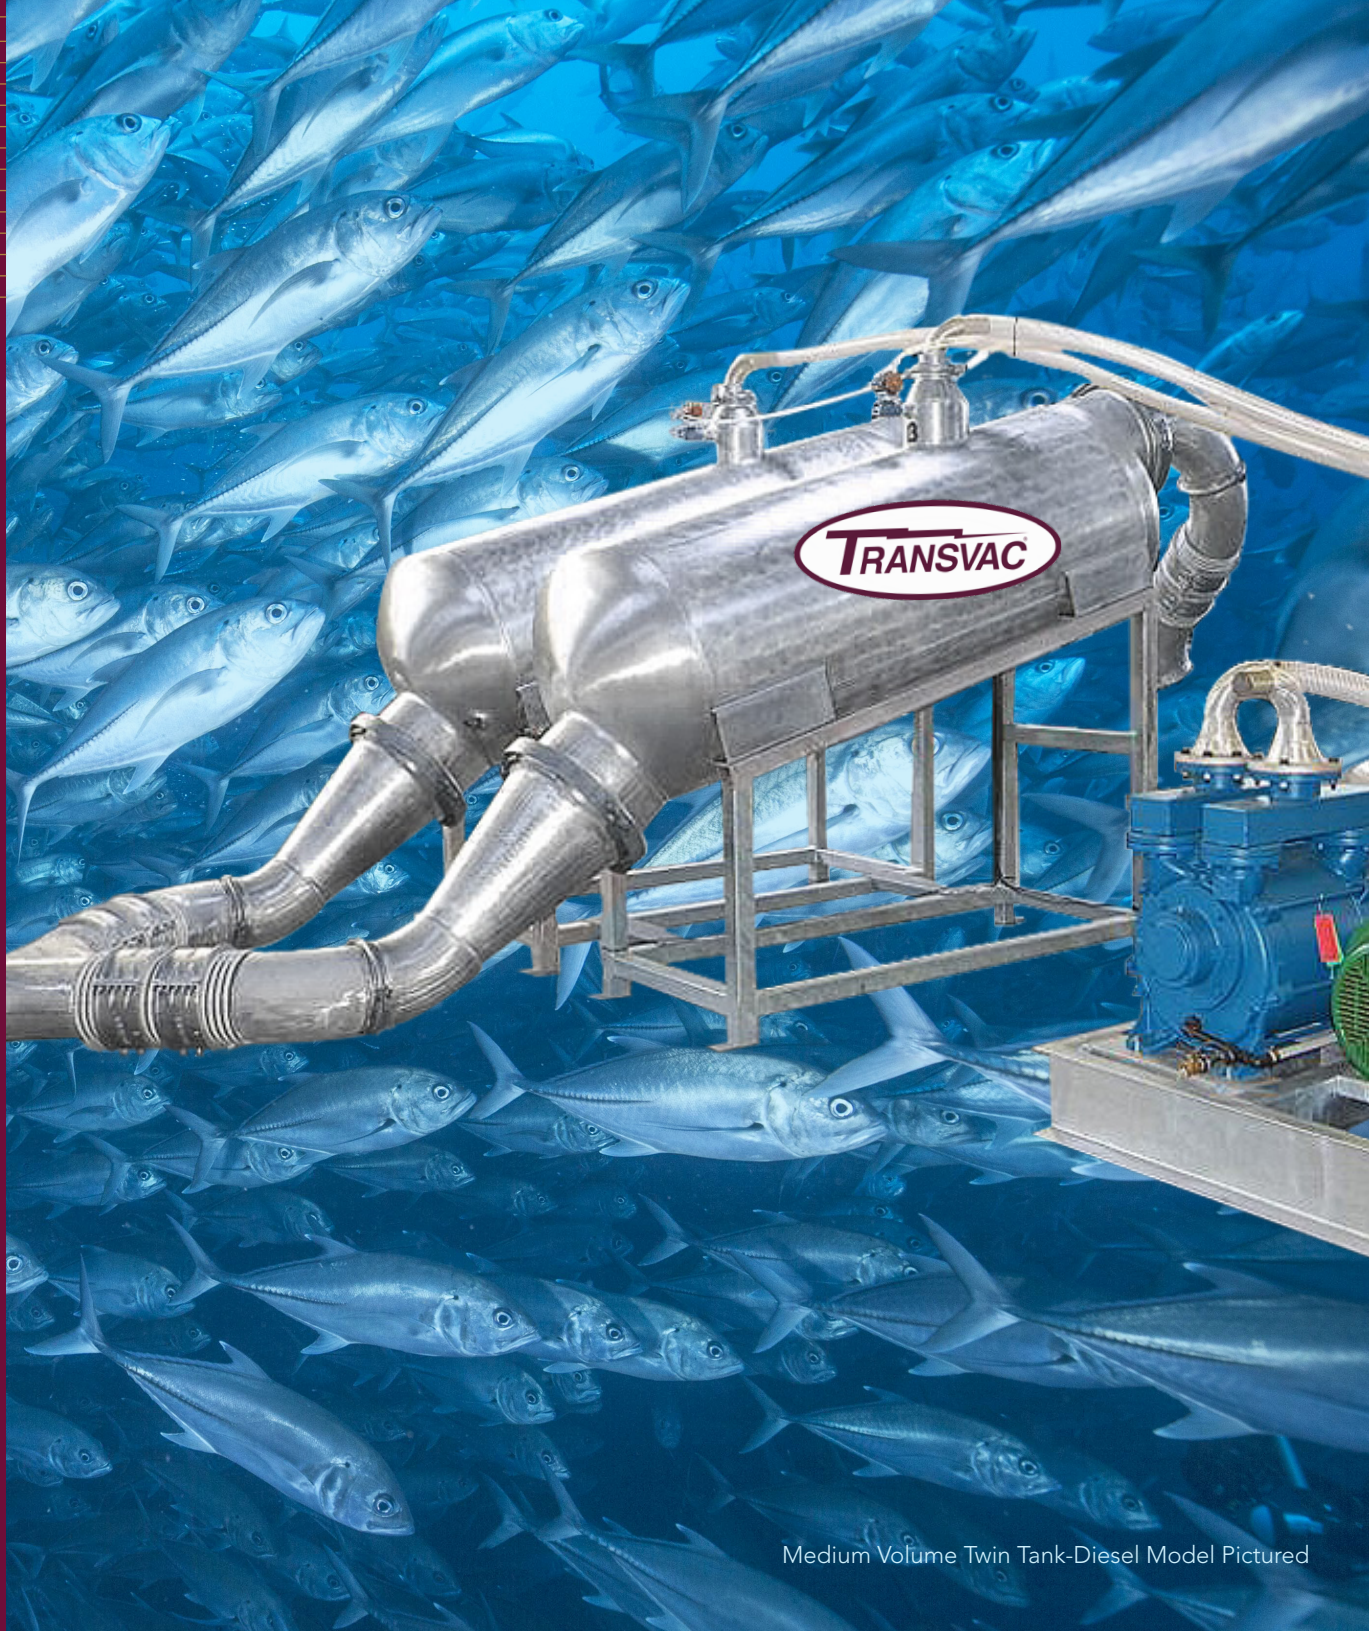

Medium Volume Twin Tank-Diesel Model Pictured