


# 9285

## FISH TRANSFER PUMP

HIGH VOLUME DOUBLE TANK SYSTEM  
150 TONS PER HOUR OF FISH

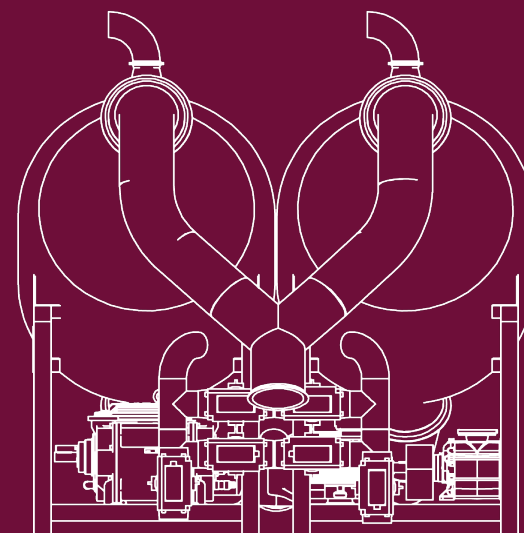

[www.transvac.com](http://www.transvac.com)

ALL MODELS HAVE A MAXIMUM SUCTION HEIGHT OF 27 FEET/ 8 METERS.  
2 TANK TRANSVAC® SYSTEMS WILL GIVE A CONTINUOUS FLOW.

| Model | Length          | Width           | Height          | Volume of Fish/ Hr. | Tank Volume      | Discharge Height | Empty Weight       | Full Weight         | Recommended Hose Dia. † |
|-------|-----------------|-----------------|-----------------|---------------------|------------------|------------------|--------------------|---------------------|-------------------------|
| 2515  | 119 in / 302 cm | 24 in / 70 cm   | 72 in / 183 cm  | 10 tons             | 11 ft3 / 31m3    | 35 ft/12m        | 995 lbs / 451 kg   | 1677 lbs / 761 kg   | 6-8 in / 15.25-20.3cm   |
| 3615  | 153 in / 390 cm | 36 in / 91 cm   | 94 in / 240 cm  | 30 tons             | 44 ft3 / 1.25 m3 | 50 ft/15m *      | 2085 lbs / 946 kg  | 4813 lbs / 2183 kg  | 10 in / 25.4 cm         |
| 3715  | 160 in / 488 cm | 36 in / 91 cm   | 100 in / 254 cm | 40 tons             | 62 ft3 / 1.75 m3 | 50 ft/15m *      | 2305 lbs / 1045 kg | 5250 lbs / 2277 kg  | 10 in / 25.4 cm         |
| 4515  | 144 in / 367 cm | 48 in / 122 cm  | 107 in / 273 cm | 50 tons             | 79 ft3 / 2.25 m3 | 50 ft/15m *      | 2540 lbs / 1150 kg | 6050 lbs / 2744 kg  | 12 in / 30.5cm          |
| 4715  | 192 in / 488 cm | 48 in / 122 cm  | 108 in / 274 cm | 60 tons             | 102 ft3 / 2.89m3 | 50 ft/15m *      | 3666 lbs / 1633 kg | 9990 lbs / 4531 kg  | 12 in / 30.5cm          |
| 2525  | 119 in / 302 cm | 50 in / 127 cm  | 72 in / 183 cm  | 20 tons             | 22 ft3 / .62 m3  | 50 ft/15m *      | 1332 lbs / 604 kg  | 2696 lbs / 1223 kg  | 6-8 in / 15.25-20.3cm   |
| 3525  | 153 in / 390 cm | 82 in / 210 cm  | 94 in / 240 cm  | 60 tons             | 88 ft3 / 2.49 m3 | 50 ft/15m *      | 4896 lbs / 2221 kg | 10352 lbs / 4696 kg | 10 in / 25.4 cm         |
| 3725  | 192 in / 488 cm | 82 in / 210 cm  | 100 in / 254 cm | 80 tons             | 100 ft3 / 2.8 m3 | 50 ft/15m *      | 5896 lbs / 2674 kg | 15032 lbs / 6818 kg | 10 in / 25.4 cm         |
| 4525  | 144 in / 367 cm | 100 in / 254 cm | 107 in / 273 cm | 100 tons            | 158 ft3 / 4.5 m3 | 50 ft/15m *      | 7050 lbs / 3197 kg | 18750 lb / 8504 kg  | 12 in / 30.5cm          |
| 4725  | 192 in / 488 cm | 100 in / 254 cm | 108 in / 274 cm | 120 tons            | 204 ft3 / 5.77m3 | 50 ft/15m *      | 7300 lbs / 3311 kg | 19948 lbs / 9048 kg | 12 in / 30.5cm          |

\* Longer distances and heights over 50 feet require additional modifications to our standard units.

AT ETI, WE KNOW HOW  
IMPORTANT IT IS TO MAINTAIN  
THE QUALITY OF YOUR  
PRODUCT, SO ALL TRANSVAC®  
SYSTEMS ARE DESIGNED TO BE  
“FISH FRIENDLY” ENSURING  
THAT YOUR LIVE FISH ARE  
TRANSFERRED “DAMAGE FREE”  
SO THAT YOU MAY GET TOP  
DOLLAR IN THE MARKET!

All pumps feature: Hydraulic, diesel,  
and electric power options.  
Suction height 27 ft (8m) max.  
Marine-grade aluminum or  
stainless steel tank construction  
depending on pressures.  
Liquid ring pumps with stainless steel  
impellers and special optional  
configurations for extra high  
or extra long discharges.



environmental technologies, inc.

201 Frontage Rd. N., Suite C. Pacific, WA 98047 USA  
Tel: 253.804.2507 Fax 253.804-2581  
[sales@transvac.com](mailto:sales@transvac.com)

# 5825

HIGH VOLUME DOUBLE TANK SYSTEM  
150 TONS PER HOUR\* (FISH)

## DIMENSIONS (Approx.)

- Overall Length: 267" (678cm)
- Overall Width 121" (307cm)
- Overall Height 129" (328cm)
- Power pack dimensions will vary if required

## FEATURES:

- Damage-free transfer of catch
- Simple operation
- 150 tons per hour
- Automatic operation
- (remote control available)
- 12" or 14" (30.5 cm or 35.5 cm) diameter hose
- 27' (8.0 m) suction lift
- Non-corrosive marine aluminum or stainless steel construction depending on pressures
- Electric or diesel power
- Low maintenance

